


# Catalyzed Lacquers



## Which Product is Best for Me?

Catalyzed lacquers combine the trouble-free ease of use of nitrocellulose lacquers with the durability of conversion varnishes. A variety of products are available that allow the wood finisher to select the product best suited for the particular article being finished.

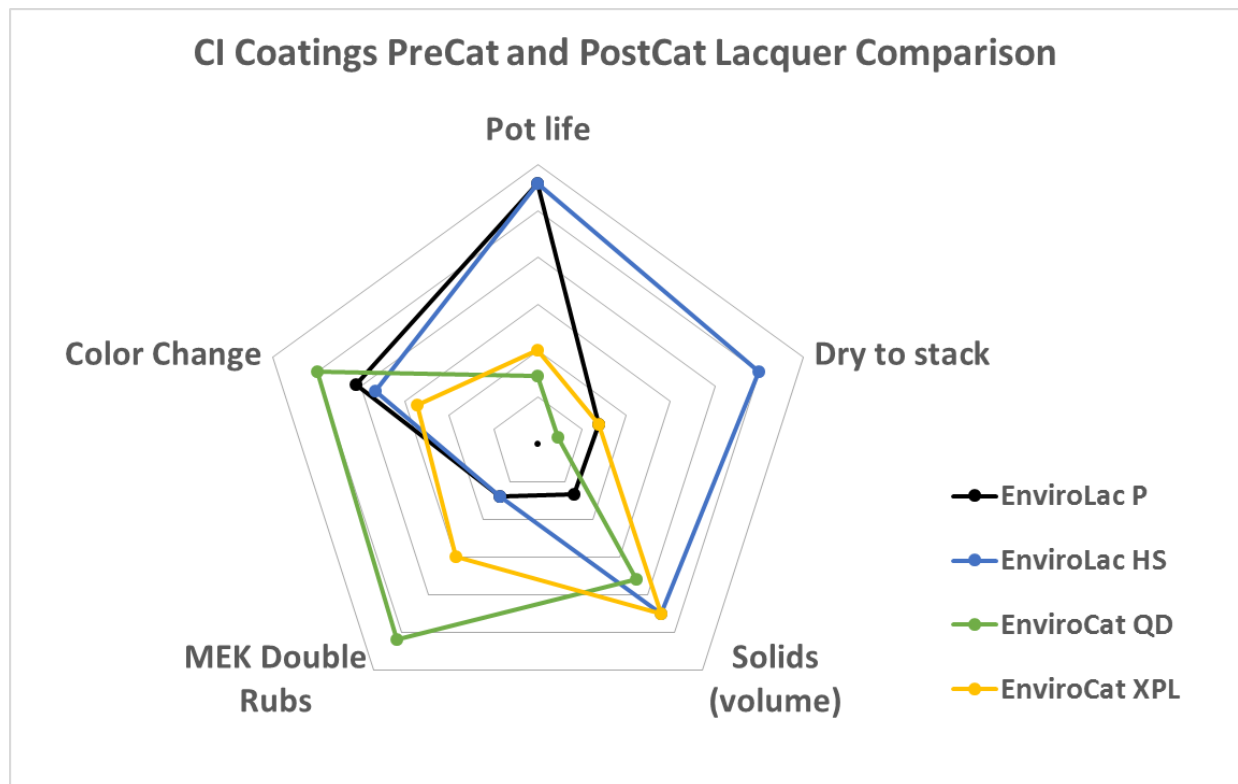

Property	Units	EnviroLac HS	EnviroLac P	EnviroCat QD	EnviroCat XPL
Dry to stack	hours	6 - 16	2 - 4	>1	2 - 4
Solids	% volume	27	22	26	27
Pot life	days	NA	NA	1	3
MEK Double Rubs	NA	35	35	310	125
Color change (200 hr QUVA over white)	DE CIELAB	4.4	4.9	6.0	3.3

For CI Coatings technical or sales assistance visit

[www.paints.com](http://www.paints.com) or call (763) 424-2044.

Rev. 3/30/16 CRB

CAUTIONS: Refer to the SDS for additional information. Thoroughly review the product label and SDS for safety and any cautions prior to use. A test sample is recommended to insure adequate adhesion to substrate, proper curing conditions and desired performance. Optimal results depend on a number of factors: nature of the substrate, the technical and physical possibilities, as well as the user's application technique. The technical data noted herein is accurate as of the date of publication and is subject to change without prior notice. CIC assumes no responsibility for coverage, performance or injuries resulting from use. Liability if any is limited to replacement of products. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY CIC, BY OPERATION OF LAW, STATUTORY, EXPRESS OR IMPLIED, OR OTHERWISE, INCLUDING FITNESS AND MECHANABILITY FOR A PARTICULAR PURPOSE. This product is intended for Industrial use only.